

LED STREET LIGHT



Features

- Modular design : easy to maintain and extend
- Special structure for pest control
- IP66 rated for protection against dust and moisture, ideal for outdoor environment
- Available with internal/ external SMPS
- Adjustable light distribution for different street configurations
- Long life up to 40,000 hours

Applications

- Roadway and public facility lighting
- Pedestrian walkways, Parks
- Border lighting

Replacement

- HID (High Intensity Discharge) 150 ~ 400W
- POSCO LED 60/ 90/ 120/ 150/ 210W



Save up to
66%


LED STREET LIGHT

Trusted Professional in LED Lighting

60W




Dimensional Drawing (mm)

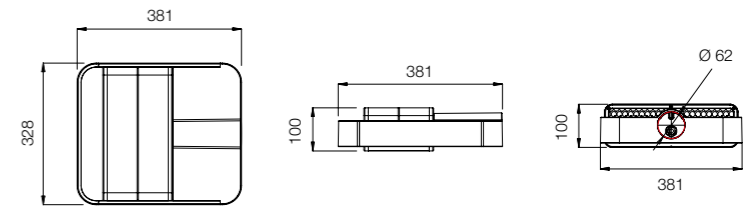


Light available with External SMPS


Light Distribution Curve

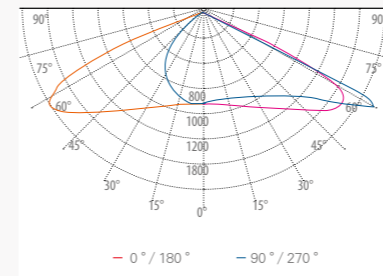

Illuminance Chart

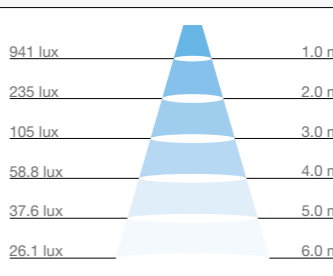


Illuminance Distribution

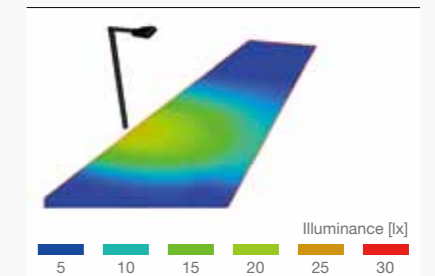

150W




Dimensional Drawing (mm)

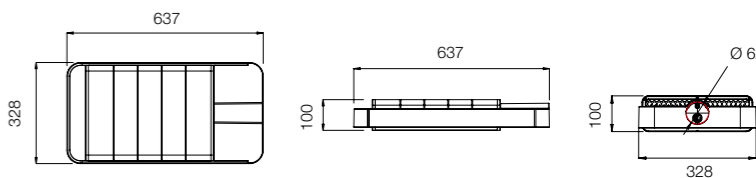


Light available with External SMPS

Light Distribution Curve

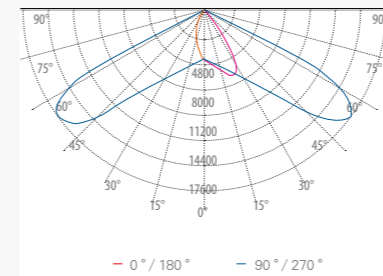

Illuminance Distribution

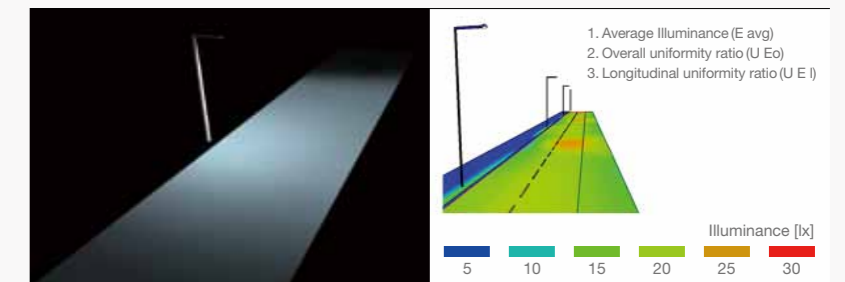

Specifications

Product Code	Watts (W)	Vin (V AC)	CCT (K)	Lumens (lm)	CRI (Ra)	Weight (kg)	Dimensions ((L)x(W)x(H)mm)
PSCHD604N3B4A	60	90 ~ 264	5,000	4,800	70 ↑	5.9	381 x 328 x 100
PSTHD904C1B4A	90	90 ~ 264	5,700	7,200	70 ↑	7.2	481 x 328 x 100
PSTHDA24C1B4A	120	90 ~ 264	5,700	9,600	70 ↑	9	559 x 328 x 100
PSTHDA54C1B4A	150	90 ~ 264	5,700	12,000	70 ↑	10.4	637 x 328 x 100
PSTHDB14C1B4A	210	90 ~ 264	5,700	16,800	70 ↑	13.4	793 x 328 x 100

* Contact your local, authorized POSCO LED street light distributor for the sized of products available with internal SMPS.

